
1. GENERAL
1. THE WALK IN FREEZER AND WALK IN COOLER EQUIPMENT SHALL COMMUNICATE WITH THE BUILDING AUTOMATION SYSTEM. THE TEMPERATURE MONITORING AND ALARM ONLY BY BAS. THE UNIT OPERATION AND CONTROL BY FACTORY-INSTALLED CONTROLS.

2. DESIGN CONDITIONS
INDOOR DESIGN CONDITIONS
BY KITCHEN CONSULTANT

3. RUN CONDITIONS
THE WALK IN COOLER/FREEZER WATER SOURCE HEAT PUMPS SHALL CYCLE ON/OFF TO MEET THE ROOM TEMPERATURE SETPOINTS (ADJ.)

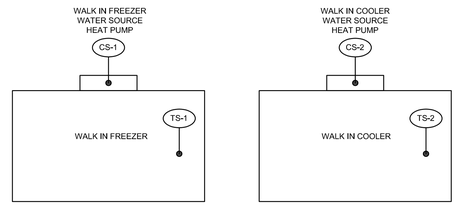


POINT	DESCRIPTION	POINT				ALARMS				GRAPHIC	TREND
		AI	AO	DI	DO	NORMAL	SAFETY	HIGH	LOW		
CS-1	CURRENT SWITCH (COMMAND ON/OFF, MONITOR STATUS)			X	X					X	X
CS-2	CURRENT SWITCH (COMMAND ON/OFF, MONITOR STATUS)			X	X					X	X
TS-1	MONITOR AND COMMAND ROOM TEMPERATURE SETPOINT	X	X					X	X	X	X
TS-2	MONITOR AND COMMAND ROOM TEMPERATURE SETPOINT	X	X					X	X	X	X

01 M503B WALK IN COOLER AND WALK IN FREEZER
Scale: NOT TO SCALE

1. GENERAL
1.1. FACTORY-PROVIDED UNIT HEATER THERMOSTATS SHALL BE USED FOR UNIT CONTROL.


1.2. A SINGLE REMOTE TEMPERATURE SENSOR INSTALLED IN THE CEILING PLENUM FOR SPACE TEMPERATURE MONITORING BY THE BUILDING AUTOMATION SYSTEM (BAS). THE TEMPERATURE SENSOR SHALL BE UTILIZED FOR MONITORING PURPOSES ONLY AND SHALL BE CONNECTED TO THE BAS FOR TRENDING AND DISPLAY.



POINT	DESCRIPTION	POINT				ALARMS				GRAPHIC	TREND
		AI	AO	DI	DO	NORMAL	SAFETY	HIGH	LOW		
CS-1	ON/OFF AND STATUS	X	X							X	X
T-1	ROOM TEMPERATURE	X						X	X	X	X
T-1	ROOM TEMPERATURE SET POINT		X							X	X

02 M503B ELECTRIC HEATER
Scale: NOT TO SCALE

1. GENERAL
1.1. NEW CONDENSER WATER BTU METER SHALL INTERFACE WITH EXISTING SCHOOL BAS AND REPORT CONDENSER WATER ENERGY, ON HOURLY, DAILY, MONTHLY AND YEARLY BASIS.



POINT	DESCRIPTION	POINT				ALARMS				GRAPHIC	TREND
		AI	AO	DI	DO	NORMAL	SAFETY	HIGH	LOW		
BTU-1	ADDITION CONDENSER WATER BTU METER	X								X	X

03 M503B CONDENSER WATER BTU METER
Scale: NOT TO SCALE


1. GENERAL
1.1. THE CONDENSATE EXHAUST HOOD SHALL BE PROVIDED WITH FACTORY CONTROLS THAT COMMUNICATE WITH THE KITCHEN CONDENSATE EXHAUST FAN AND THE HVAC MAKEUP AIR UNIT. CONTROLS WILL BE TIED INTO THE BUILDING AUTOMATION SYSTEM FOR REMOTE MONITORING AND CONTROLS.

2. EXHAUST HOOD
2.1 THE CONDENSATE EXHAUST HOOD WILL BE PROVIDED AND SWITCHED ON THROUGH THE HOOD CONTROL PANEL. THE HOOD OPERATION CAN ALSO BE OVERRIDDEN VIA THE BUILDING AUTOMATION SYTSTEM.
2.2 THE EXHAUST HOOD IS PROVIDED WITH A 'VFD THERMOSTAT'. THE VFD THERMOSTATS SHALL SEND 0-10 VDC SIGNALS TO MODULATE THE EXHAUST FAN AND MAKEUP AIR FAN BASED ON INTENSITY OF COOKING OPERATIONS.

3. EXHAUST FAN
3.1 UPON RECEIVING SIGNAL TO START FROM THE CONDENSATE EXHAUST HOOD CONTROL PANEL OR THE OVERRIDE SWITCH, THE KITCHEN EXHAUST FAN SHALL ENERGIZE AND MODULATE ITS SPEED PER THE SIGNAL FROM THE VFD THERMOSTAT.
3.2 THE FAN SHALL STOP UPON COMMAND FROM THE KITCHEN EXHAUST HOOD CONTROL PANEL OR VIA THE BAS.
3.3 THE CONDENSATE EXHAUST FAN AND THE MAKEUP AIR UNIT SHALL BE AIR BALANCED TO PROVIDE THE APPROPRIATE CFM DIFFERENCE AT ALL FAN SPEEDS.

4. MAKEUP AIR UNIT
4.1 UPON RECEIVING A SIGNAL TO START FROM THE EXHAUST HOOD CONTROL PANEL OR THE BAS, THE MAKEUP AIR UNIT MOTORIZED DAMPER SHALL OPEN AND THE MAKEUP AIR UNIT FAN SHALL ENERGIZE. THE SUPPLY FAN SHALL MODULATE TO MAINTAIN THE SPEED PER THE SIGNAL FROM THE VFD THERMOSTAT AT THE KITCHEN EXHAUST HOOD.

4.2 UPON COMMAND TO STOP FROM THE KITCHEN EXHAUST HOOD CONTROL PANEL OR THE OVERRIDE SWITCH, THE MAKEUP AIR UNIT FAN SHALL TURN OFF AND THE OUTSIDE AIR DAMPER SHALL CLOSE.
4.3 THE EXHAUST FAN AND THE MAKEUP AIR UNIT SHALL BE AIR BALANCED TO PROVIDE THE APPROPRIATE CFM DIFFERENCE AT ALL FAN SPEEDS, UL LISTED DAMPERS SHALL BE PROVIDED BY THE HOOD VENDOR.

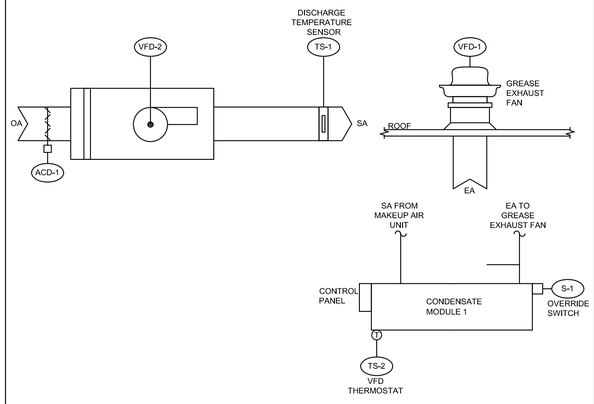

SYSTEM POINT	DESCRIPTION	POINT			
		AI	AO	DI	DO
ACD-1	ISOLATION DAMPER				X
S-1	ON/OFF SWITCH			X	
TS-1	MAKEUP AIR DISCHARGE TEMPERATURE SENSOR	X			
TS-2	HOOD TEMPERATURE SENSOR	X			
VFD-1	MAKEUP AIR FAN - START/STOP				X
VFD-1	MAKEUP AIR FAN - SPEED	X			
VFD-2	EXHAUST FAN - START/STOP				X
VFD-2	EXHAUST FAN - SPEED	X			

04 M503B KITCHEN EXHAUST HOOD, KITCHEN GREASE EXHAUST FAN AND MAKEUP AIR UNIT
Scale: NOT TO SCALE

THIS AREA RESERVED FOR DCRA STAMPS

shinberg.levinas

Shinberg Levinas 5101 Wisconsin Ave #310 T 202.244.5101
Architectural Design Inc. ington, DC 20016 F 202.244.5363

Designs and drawings are protected by copyright, and may not be reused, copied or reproduced without the expressed written consent of the entity above.

© Copyright 2023 Shinberg Levinas Architectural Design Inc.
All rights reserved worldwide

STODDERT ES
WEST END CAFETERIA

4001 CALVERT ST, NW
WASHINGTON, DC 20007

OWNER

DISTRICT OF COLUMBIA
DC DEPARTMENT OF GENERAL SERVICES (DGS)
DC PUBLIC SCHOOLS (DCPS)

CIVIL ENGINEER

WILES MENSCH CORPORATION - DC
510 8TH ST SE
WASHINGTON, DC 20003
(202) 638-4040

LANDSCAPE ARCHITECT

BRADLEY SITE DESIGN
1010 WISCONSIN AVE NW, #208
WASHINGTON, DC 20007
(202) 695-8056

STRUCTURAL ENGINEER

SILMAN ASSOCIATES
1053 31ST NW
WASHINGTON, DC 20007
(202) 333-6230

MEP+FP ENGINEER

GLOBAL ENGINEERING SOLUTIONS OF WASHINGTON DC (GES)
4400 JENIFER ST NW #240,
WASHINGTON, DC 20015
(202) 295-7746

LIGHTING

CM KLING + ASSOCIATES
1020 CAMERON ST
ALEXANDRIA, VA 22314
(703) 684-6270

KITCHEN / FOOD SERVICE

NYKOS-GARCIA FOODSERVICE DESIGN
18219-A FLOWER HILL WAY
GAITHERSBURG, MD 20879
(240) 683-9530

LEED CONSULTANT

DAN TRIMAN
17 E 9TH ST
FREDERICK, MD 21701
(410) 300-036

ISSUES

NO.	ISSUE	DATE
	SCHEMATIC DESIGN - CAFETERIA	2023/12/01
	DESIGN DEVELOPMENT - CAFETERIA	2024/02/28
	SCHEMATIC DESIGN (2) - CAFETERIA	2024/06/14
	DESIGN DEVELOPMENT (2) - CAFETERIA	2024/07/15
	PERMIT SET - CAFETERIA	2024/10/31
	50% CD SET - CAFETERIA	2024/12/23
	100% CD SET - CAFETERIA	2025/06/06
	RFI - W139	2026/03/02

SEAL

DATE: 06/06/2025

SCALE: 1/8" = 1'-0"

MECHANICAL - CONTROLS

M503B